




Translation of the Original Operating Manual

For professional use.
Always follow the information in this manual,
particularly the safety instructions and the warning
instructions. Store the manual in a safe place.

Version 01/2018

GM 4100 AC

AirCoat Manual Gun for Flat and Round Jet Nozzles

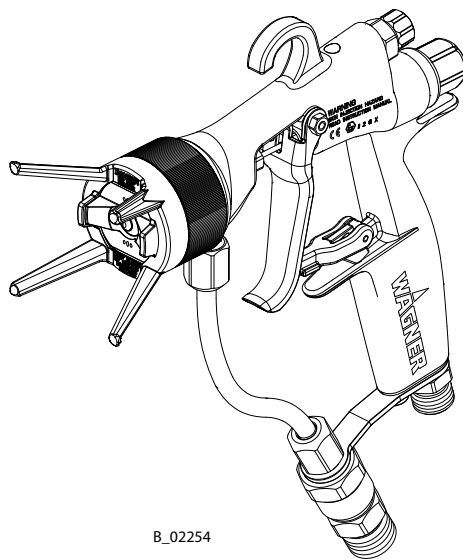

B_02254

Table of Contents

1	ABOUT THESE INSTRUCTIONS	6
1.1	Preface	6
1.2	Warnings, Notices and Symbols in these Instructions	6
1.3	Languages	7
1.4	Abbreviations	7
1.5	Terminology for the Purpose of this Manual	7
2	CORRECT USE	8
2.1	Device Type	8
2.2	Type of Use	8
2.3	For Use in Potentially Explosive Areas	8
2.4	Processible Working Materials	8
2.5	Misuse	8
3	IDENTIFICATION	9
3.1	Explosion Protection Identification	9
3.2	Identification "X"	9
3.3	Type plate	10
4	BASIC SAFETY INSTRUCTIONS	11
4.1	Safety Instructions for the Operator	11
4.1.1	Electrical Devices and Equipment	11
4.1.2	A Safe Work Environment	11
4.1.3	Personnel Qualifications	12
4.2	Safety Instructions for the Personnel	12
4.2.1	Personal Safety Equipment	12
4.2.2	Safe Handling of WAGNER Spray Devices	13
4.2.3	Grounding the Unit	13
4.2.4	Product hoses	14
4.2.5	Cleaning and Flushing	15
4.2.6	Touching Hot Surfaces	15
4.2.7	Maintenance and Repair	16
4.2.8	Protective and Monitoring Equipment	16
5	DESCRIPTION	17
5.1	Components	17
5.2	Mode of Operation	17
5.3	Protective and Monitoring Equipment	17
5.4	Included Items	17
5.4.1	Version for application up to 25 MPa; 250 bar; 3,625 psi	17
5.4.2	Standard equipment	17
5.5	Data	18
5.5.1	Materials of Paint-wetted Parts	18
5.5.2	Technical data	18
5.5.3	Dimensions and Connections	18

6	ASSEMBLY AND COMMISSIONING	19
6.1	Training of Assembly/Commissioning Personnel	19
6.2	Storage Conditions	19
6.3	Installation Conditions	19
6.4	Installation and Connection	20
6.4.1	Typical AirCoat spraying system	20
6.4.2	Ventilation of the Spray Booth	20
6.4.3	Air Supply Lines	21
6.4.4	Product supply lines	21
6.5	Grounding	21
6.6	Safety Checks	21
6.7	Lacquer Preparations	21
6.8	Commissioning	22
6.8.1	Procedure	22
6.8.2	Verifying a Safe Operational Condition	22
7	OPERATION	23
7.1	Training the Operating Personnel	23
7.2	Tasks	23
7.2.1	Starting to Spray with the AirCoat	23
7.2.2	Adjusting the Spray Pattern	24
7.3	Pressure Relief/Work Interruption	24
7.4	Changing AirCoat Nozzle	25
7.4.1	Cleaning AirCoat Nozzle	25
7.4.2	Eliminating Nozzle Clogging	26
8	CLEANING AND MAINTENANCE	27
8.1	Cleaning	27
8.1.1	Cleaning Personnel	27
8.1.2	Flushing and Cleaning the Spray Gun	27
8.2	Maintenance	28
8.2.1	Maintenance Personnel	28
8.2.2	Safety instructions	28
8.2.3	Safety Checks and Maintenance Intervals	29
8.2.4	Replacing the Product Hose or Air Hose	30
8.2.5	Changing or Cleaning the Edge Filter	31
9	TROUBLESHOOTING AND RECTIFICATION	32
10	REPAIR WORK	33
10.1	Repair Personnel	33
10.2	Repair Notes	33
10.3	Tools	33
10.4	Replacing Parts on the Valve Rod	34
10.4.1	Replacing Valve Tappet Seals	35
10.4.2	Replacing the Rod Seal (35)	35
10.4.3	Assembly	36
10.5	Replacing the Nozzle Seal	36
10.6	Replacing the "Air" Sealing Ring	37
10.7	Replacing the Spring Cap	37

11	FUNCTION TEST AFTER REPAIR WORK	38
12	DISPOSAL	39
13	ACCESSORIES	40
13.1	Round Jet Nozzle Attachment	40
13.1.1	Nozzle Inserts RXX	40
13.1.2	Nozzle Screw Joint, Complete	40
13.2	AirCoat Nozzles ACF3000	41
13.3	Air caps	42
13.4	Anodized Union Nut	43
13.5	Swivel Joints and Filter	43
13.6	Hoses	44
13.7	Miscellaneous	44
14	SPARE PARTS	45
14.1	How can spare parts be ordered?	45
14.2	Spare Parts List GM 4700AC	46
15	EU DECLARATION OF CONFORMITY	48

1 ABOUT THESE INSTRUCTIONS

1.1 PREFACE

The operating manual contains information about safely operating, maintaining, cleaning and repairing the device.

The operating manual is part of the device and must be available to the operating and service personnel.

The device may only be operated by trained personnel and in compliance with this operating manual.

Operating and service personnel should be instructed according to the safety instructions. This equipment can be dangerous if it is not operated according to the instructions in this operating manual.

1.2 WARNINGS, NOTICES AND SYMBOLS IN THESE INSTRUCTIONS

Warning instructions in this manual highlight particular dangers to users and to the device and state measures for avoiding the hazard. These warning instructions fall into the following categories:

 DANGER

Immediate risk of danger.
Non-observance will result in death or serious injury.

 WARNING

Potential risk.
Non-observance can result in death or serious injury.

 CAUTION

Potentially hazardous situation.
Non-observance may result in minor injury.

 NOTICE

Potentially hazardous situation.
Non-observance may result in damage to property.

Notice

Provides information about particular characteristics and how to proceed.

Explanation of warning notice:

 LEVEL OF DANGER

This notice warns you of a hazard!

Possible consequences of not observing the warning notice.

→ The measures for preventing the hazard and its consequences.



1.3 LANGUAGES

The operating manual is available in the following languages:

Original operating manual

Language	Order no.
German	394820

Translation of the original operating manual

Language	Order no.	Language	Order no.
English	394821	Danish	2301125
French	2301121	Dutch	2301122
Italian	2301118	Swedish	2301129
Spanish	2301119	--	--

Additional languages on request or at: www.wagner-group.com

1.4 ABBREVIATIONS

Order no.	Order number	LV	for low-viscosity (LV) products
ET	Spare part	HV	for high-viscosity (HV) products
K	Marking in the spare parts lists	LA	Low air
Pos	Position	GM	Manual gun
Stk	Number of pieces	AC	AirCoat
SW	Wrench size	--	--

1.5 TERMINOLOGY FOR THE PURPOSE OF THIS MANUAL

Cleaning	
Cleaning	Manual cleaning of devices and device parts with cleaning agent.
Flushing	Internal flushing of paint-wetted parts with flushing agent.
Product pressure generator	Pump or pressure tank.
Personnel qualifications	
Trained person	Is instructed in the tasks assigned to him/her, the potential risks associated with improper behavior as well as the necessary protective devices and measures.
Electrically trained person	Is instructed by an electrician about the tasks assigned to him/her, the potential risks associated with improper behavior as well as the necessary protective devices and measures.
Electrician	Can assess the work assigned to him/her and detect possible hazards based on his/her technical training, knowledge and experience in relevant provisions.
Skilled person in accordance with TRBS 1203 (2010/Revision 2012)	A person, who, based on his/her technical training, experience and recent vocational experience, has sufficient technical knowledge in the areas of explosion protection, protection from pressure hazards and electric hazards (if applicable) and is familiar with the relevant and generally accepted rules of technology so that he/she can inspect and assess the status of devices and coating systems based on workplace safety.

2 CORRECT USE

2.1 DEVICE TYPE

Manual gun for manually coating work pieces.

GM 4100 AC

2.2 TYPE OF USE

The automatic spray gun is suitable for atomizing liquid products, particularly coating products, using the AirCoat process.

- Non-ignitable products.
- Products in accordance with their classification in explosion class IIB.

WAGNER explicitly prohibits any other use!

The device may only be operated under the following conditions:

- Use the device only to work with the products recommended by WAGNER.
- Do not deactivate safety fixtures.
- Use only WAGNER original spare parts and accessories.
- The operating personnel must be trained on the basis of this operating manual.

2.3 FOR USE IN POTENTIALLY EXPLOSIVE AREAS

The device is suitable for use in potentially explosive areas as defined in Directive 2014/34/EU (ATEX), (see Explosion protection marking Chapter [3.1](#)).



2.4 PROCESSIBLE WORKING MATERIALS

Top-coat lacquers, primer paints, corrosion protection, textured lacquers, lyes, staining solvents, clear lacquers, separating agents, etc. with a solvent or water base. If you want to spray working materials other than the aforementioned, contact a WAGNER representative.

Note:

Contact your local WAGNER dealer and the lacquer manufacturer if you encounter application problems.

2.5 MISUSE

Misuse can lead to physical injury and/or property damage!

Special attention must be paid that:

- no dry coating products, e.g. powder are processed;
 - no food, medicine or cosmetics are processed.
- It is important to note that the device's materials are not food-safe.

3 IDENTIFICATION

3.1 EXPLOSION PROTECTION IDENTIFICATION

As defined in the Directive 2014/34/EU (ATEX), the device is suitable for use in potentially explosive areas.

Device type: AirCoat manual gun GM 4100 AC
 Manufacturer: Wagner International AG
 CH-9450 Altstätten, Switzerland

  II 2G X

CE European Communities
 Ex Symbol for explosion protection
 II Device class II
 2 Category 2 (zone 1)
 G Ex-atmosphere gas
 X Special notice



3.2 IDENTIFICATION "X"

The maximum surface temperature corresponds to the permissible product temperature. This and the permissible ambient temperature can be found in Chapter [5.5.2](#).

Safe Handling of WAGNER Spray Devices

Mechanical sparks can form if the device comes into contact with metal.
 In an explosive atmosphere:

- knocking or pushing metal against metal is to be avoided;
- do not drop the device.

Ignition temperature of the coating product

- Ensure that the ignition temperature of the coating product is above the maximum surface temperature.

Medium supporting atomizing

- To atomize the product, use only weakly oxidizing gases, e.g., air.


Cleaning

If there are deposits on the surfaces, the device may form electrostatic charges. Flames or sparks can form during discharge.

- Remove deposits from the surfaces to maintain conductivity.
- Use only a damp cloth to clean the device.

3.3 TYPE PLATE

- 1** Serial-No. XXXXX
2 Max. p air 0.8 MPa (115 psi)
3 Max. p fluid see tension nut
4 Max. T fluid 55°C (131°F)
 Wagner International AG, Altstaetten
 Made in Switzerland



- 5** WARNING
6 SKIN INJECTION HAZARD
 READ INSTRUCTION MANUAL
 CE Ex II 2GX

Pos	Designation
1	Serial number
2	Maximum air inlet pressure
3	Maximum product pressure see spring cap
4	Maximum product temperature
5	Warning
6	Danger of injury from injection/read operating manual

4 BASIC SAFETY INSTRUCTIONS

4.1 SAFETY INSTRUCTIONS FOR THE OPERATOR

- Keep this operating manual at hand near the device at all times.
- Always follow local regulations concerning occupational safety and accident prevention.



4.1.1 ELECTRICAL DEVICES AND EQUIPMENT

Electric shock hazard!

Danger to life from electric shock

- Prepare device in accordance with the local safety requirements with regard to the operating mode and ambient influences.
- May only be maintained by skilled electricians or under their supervision. With open housings, the mains voltage poses a danger.
- Operate device in accordance with the safety regulations and electrotechnical regulations.
- Must be repaired immediately in the event of problems.
- Decommission if it poses a hazard or is damaged.
- Must be de-energized before work is commenced. Inform personnel about planned work. Observe electrical safety regulations.
- Ground all devices to a common grounding point.
- Only operate the device with a properly installed socket with a protective ground wire connection.
- Keep liquids away from electrical devices.



4.1.2 A SAFE WORK ENVIRONMENT

Hazard due to dangerous fluids or vapors!

Severe or fatal injuries due to explosion hazard or inhalation, swallowing or contact with the skin or eyes.

- Ensure that the floor in the working area is static dissipative in accordance with EN 61340-4-1 (resistance must not exceed 100 MΩ).
- Paint mist extraction systems/ventilation systems must be fitted on site according to local regulations.
- Make sure that the ground connection and potential equalization of all system parts are reliable and continuous and can withstand the expected stress (e.g. mechanical stress, corrosion).
- Ensure that product hoses / air hoses adapted to the working pressure are used.
- Ensure that personal protective equipment (see Chapter [4.2.1](#)) is available and is used.
- Ensure that all persons within the working area wear static dissipative shoes. Footwear must comply with EN 20344. The measured insulation resistance must not exceed 100 MΩ.
- Ensure that during spraying, persons wear electrically conductive gloves. The grounding takes place via the spray gun handle or the trigger.
- Protective clothing, including gloves, must comply with EN 1149-5. The measured insulation resistance must not exceed 100 MΩ.



- Ensure that there are no ignition sources such as naked flames, sparks, glowing wires, or hot surfaces in the vicinity. No smoking.
- Ensure that the pipe joints, hoses, equipment parts and connections are permanently, technically leak-proof:
 - Periodic preventative maintenance and service (replacing hoses, checking tightness strength of the connections etc.).
 - Regular monitoring of leaks and defects via visual inspection and odor testing, e.g., daily before commissioning, at the end of work or weekly.
- Ensure that maintenance and safety checks are performed regularly.
- In the event of defects, immediately bring the device or system to a stop and arrange to have repairs carried out immediately.

4.1.3 PERSONNEL QUALIFICATIONS

Hazard due to incorrect use of device!

Risk of death due to untrained personnel.

- Ensure that the operating personnel has been instructed by the operator in accordance with the operating manual and the operating instructions. The device must only be operated, maintained and repaired by trained personnel. Refer to the operating instructions for information about the required personnel qualifications.

4.2 SAFETY INSTRUCTIONS FOR THE PERSONNEL

- Always follow the information in this manual, particularly the safety instructions and the warning instructions.
- Always follow local regulations concerning occupational safety and accident prevention.



4.2.1 PERSONAL SAFETY EQUIPMENT

Hazard due to dangerous fluids or vapors!

Serious or fatal injuries due to inhalation, swallowing or contact with the skin or eyes.

- When preparing or working with lacquer and when cleaning the device, follow the working instructions of the manufacturer of the lacquers, solvents, and cleaning agents being used.
- Take the specified protective measures. In particular wear safety goggles, protective clothing and gloves, as well as hand protection cream if necessary.
- Use a mask or breathing apparatus if necessary.
- For sufficient health and environmental safety: Operate the device in a spray booth or on a spraying wall with the ventilation (extraction) switched on.
- Wear suitable protective clothing when working with hot products.



4.2.2 SAFE HANDLING OF WAGNER SPRAY DEVICES**Hazard due to injection of lacquer or flushing agent into the skin!**

The spray jet is under pressure and can cause dangerous injuries. Avoid injection of lacquer or flushing agents:

- Never point the spray gun at people.
- Never reach into the spray jet.
- Before any work on the device, in the event of work interruptions and malfunctions:
 - Switch off the energy/compressed air supply.
 - Relieve the pressure from the spray gun and device.
 - Secure the spray gun against actuation.
 - Disconnect the control unit from the mains.
 - In the event of functional faults: remedy the fault as described in the "Troubleshooting" chapter.
- If necessary or at least every 12 months, the liquid ejection devices must be checked for safe working conditions by an expert (e.g. WAGNER Service Technician) in accordance with the guidelines for liquid ejection devices (ZH 1/406 and DGUV 100-500 Chapters 2.29 and 2.36).
 - For shut down devices, the examination can be suspended until the next start-up.

**In the event of skin injuries caused by lacquer or flushing agents:**

- Note the lacquer or flushing agent that you have been using.
- Consult a doctor immediately.

Danger due to recoil forces!

Actuating the trigger can cause strong recoil forces. Thereby, the user can lose his balance and injure himself when falling.

Avoid risk of injury from recoil forces:

- Ensure that you have firm footing when operating the spray gun.

**4.2.3 GROUNDING THE UNIT****Hazard due to electrostatic charge!**

Explosion hazard and damage to the device.

Friction, flowing liquids and air or electrostatic coating processes create charges. Flames or sparks can form during discharge.

Correct grounding of the entire spraying system prevents electrostatic charges.

- Ensure that all devices and tanks are grounded before each spraying process.
- Ground the work pieces to be coated.
- Ensure that all persons inside the working area are grounded, e.g., that they are wearing static dissipative shoes.
- Wear static dissipative gloves when spraying. The grounding takes place via the spray gun handle or the trigger.



4.2.4 PRODUCT HOSES

Hazard due to bursting of product hose!

The product hose is under pressure and may cause dangerous injuries.

- Ensure that the hose material is chemically resistant to the sprayed products and the flushing agents used.
- Ensure that the product hose and the fittings are suitable for the pressure generated.
- Ensure that the following information can be seen on the high-pressure hose:
 - manufacturer,
 - permissible operating pressure,
 - date of manufacture.
- Make sure that the hoses are laid only in suitable places. Hoses should not be laid in the following places under any circumstances:
 - in high-traffic areas,
 - on sharp edges,
 - on moving parts or
 - on hot surfaces.
- Ensure that the hoses are never run over by vehicles (e.g., fork lift trucks), or that the hoses are never put under pressure from the outside in any other way.
- Ensure that the hoses are never kinked. Observe maximum bending radii.
- Ensure that no work is ever performed with a damaged hose.
- Make sure that the hoses are never used to pull or move the equipment.
- The electrical resistance of the product hose, measured at both valves, must be less than 1 MΩ.
- Suction hoses may not be subjected to pressure.



4.2.5 CLEANING AND FLUSHING

Hazard due to cleaning and flushing!

Explosion hazard and damage to the device.

- Preference should be given to non-ignitable cleaning and flushing agents.
- When carrying out cleaning work with flammable cleaning agents, make sure that all equipment and resources (e.g., collection tank, funnel, transport cart) are conductive or static dissipative and grounded.
- Observe the specifications of the lacquer manufacturer.
- Ensure that the flash point of the cleaning agent is at least 15 K above the ambient temperature or that cleaning is undertaken at a cleaning station with technical ventilation.
- Never use chloride or halogenated solvents (such as trichloroethane and methylene chloride) with units containing aluminium or galvanized and zinc-plated parts. They may react chemically thus producing an explosion danger.
- Take measures for workplace safety (see Chapter [4.1.2](#)).
- When commissioning or emptying the device, please note that:
 - depending upon the coating product used,
 - depending on the flushing agent (solvent) used.
 an explosive mixture may temporarily exist inside the lines and components of equipment.
- Only electrically conductive tanks may be used for cleaning and flushing agents.
- The tanks must be grounded.




An explosive gas/air mixture forms in closed tanks.

- Never spray into a closed tank when using solvents for flushing.

External Cleaning

When cleaning the exterior of the device or its parts, also observe the following:

- Relieve the pressure from the device.
- De-energize the device electrically.
- Disconnect the pneumatic supply line.
- Use only moistened cloths and brushes. Never use abrasive agents or hard objects and never spray cleaning agents with a gun. Cleaning the device must not damage it in any way.
- Ensure that no electric component is cleaned with or immersed into solvent.



4.2.6 TOUCHING HOT SURFACES

Hazard due to hot surfaces because of hot coating products!

Risk of burn injuries

- Only touch hot surfaces if you are wearing protective gloves.
- When operating the device with a coating product with a temperature of > 43 °C; 109 °F:
 - Identify the device with a warning label "Warning - hot surface".

Order no.

9998910 instruction label

9998911 protection label

Note: Order the two stickers together.



4.2.7 MAINTENANCE AND REPAIR

Hazard due to improper maintenance and repair!

Danger to life and equipment damage.

- Only a WAGNER service center or a suitably trained person may carry out repairs and replace parts.
- Use only WAGNER original spare parts and accessories.
- Do not change or modify the device; if change is necessary, contact WAGNER.
- Only repair and replace parts that are listed in Chapter [13](#) and Chapter [14](#) that are assigned to the unit.
- Do not use any defective components.
- Before all work on the device and in the event of work interruptions:
 - Relieve the pressure from the spray gun, high-pressure hoses and all devices.
 - Secure the spray gun against actuation.
 - Switch off the energy and compressed air supply.
 - Disconnect the control unit from the mains.
- Observe the operating and service manual for all work.

4.2.8 PROTECTIVE AND MONITORING EQUIPMENT

Hazard due to removal of protective and monitoring equipment!


Danger to life and equipment damage.

- Protective and monitoring equipment must not be removed, modified or rendered unusable.
- Regularly check for perfect functioning.
- If defects are detected on protective and monitoring equipment, the system must not be operated until these defects are remedied.

5 DESCRIPTION

5.1 COMPONENTS

Pos	Designation
A	Suspension hook
B	Shaping air regulator
C	Clamping nut
D	Trigger
E	Trigger locking device
F	Air connection
G	Fluid inlet
H	Union nut with nozzle protection
I	Nozzle / Air cap
J	Spray gun housing
K	Filter housing
L	Handle tube

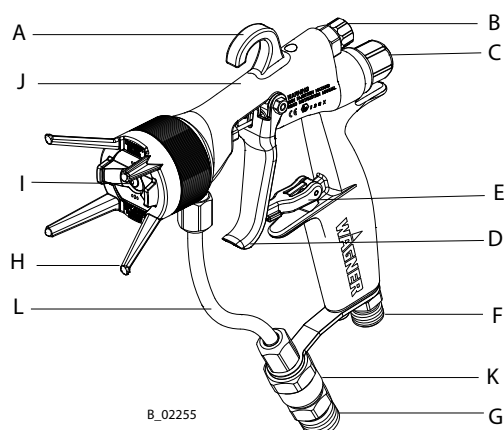

5.2 MODE OF OPERATION

If the trigger (D) is operated when the trigger locking device (E) is released, then the air valve opens first. Atomizing air flows through the air connection (F) to the air cap (I). The product valve opens first if approx. 1/2 of the trigger's path is covered. The quantity of air for the atomization of the spray jet is preset via the external air automatic controller. The spray pattern can be adjusted using the shaping air regulator (B).

5.3 PROTECTIVE AND MONITORING EQUIPMENT

The spray gun is secured with the locking device (E) (the locking device turned in the spraying direction and fastened in the groove). The nozzle holder (H) has an anti-contact guard.

5.4 INCLUDED ITEMS

This AirCoat manual gun is available in three different versions. The choice of nozzle depends on the application, therefore this component is not included in the standard scope of delivery. A selection guide for spray gun accessories can be found in Chapter [13](#).

5.4.1 VERSION FOR APPLICATION UP TO 25 MPa; 250 BAR; 3,625 PSI

Stk	Order no.	Designation
1	394012	GM 4100AC 25 MPa; NPSM1/4" product connection
1	2302513	GM 4100AC 25 MPa with air cap low-viscosity, red
1	2302514	GM 4100AC 25 MPa with high-viscosity air cap, blue

Please always order the nozzle separately.

5.4.2 STANDARD EQUIPMENT

Stk	Order no.	Designation
1	394891	CE Declaration of Conformity
1	394820	Operating manual, in German
1	see Chapter 1.3	Operating manual in local language
1	394335	Spring cap 16 MPa; 160 bar; 2320 psi

For special versions the delivery note applies.

5.5 DATA**5.5.1 MATERIALS OF PAINT-WETTED PARTS**

Metals		Plastics	
Carbide	Stainless steel 1.4305	POM	FPM
Stainless steel 1.4301	Stainless steel 1.4104	PTFE	PA

5.5.2 TECHNICAL DATA


Description	Units	Value
Maximum air inlet pressure	MPa; psi; bar	0.8; 120; 8
Maximum product pressure	MPa; psi; bar	25; 3625; 250 (16; 2320; 160*)
Fluid inlet	inch	NPSM1/4
Air connection	inch	G1/4"
Filter	Mesh	see Chapter 13.5
Weight	g; oz	437; 15.4
pH range of the product	pH	3.5 - 9.0
Maximum product temperature	°C; °F	55; 131
Maximum air temperature	°C; °F	43; 109
Sound level at 0.3 MPa; 3 bar; 43.5 psi air pressure and 11 MPa; 110 bar; 1549 psi product pressure**	dB(A)	< 82

* Spring cap 16 MPa; 160 bar; 2320 psi is included

** A-rated sound pressure level measured at 0.5 m distance, Lpa 0.5 m, according to DIN EN 14462: 2015.

5.5.3 DIMENSIONS AND CONNECTIONS

Dimensions		
Pos	mm	inch
A	173	6.81
B	206	8.11
C	48	1.89
D	152	5.98
E	39	1.54
F	--	NPSM 1/4"
G	--	G1/4"

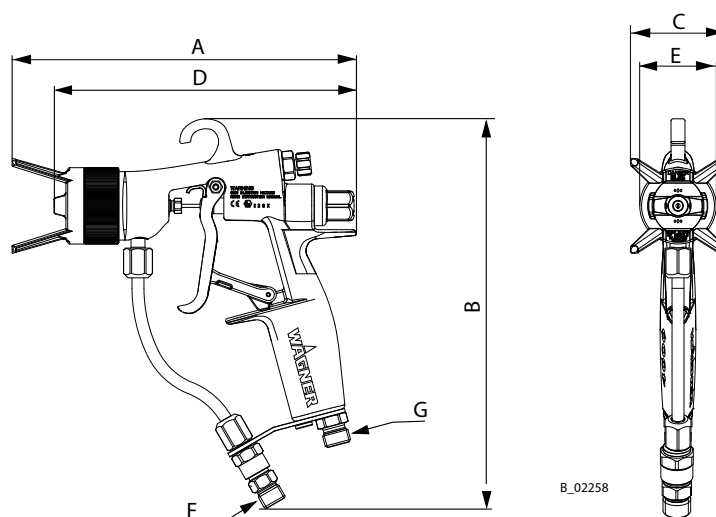

B_02258

6 ASSEMBLY AND COMMISSIONING

6.1 TRAINING OF ASSEMBLY/COMMISSIONING PERSONNEL

- The assembly and commissioning personnel must have the technical skills to safely commission the device.
- When assembling, commissioning and carrying out all work, read and follow the operating manuals and safety regulations for the additionally required system components.

A skilled person must check to ensure that the device is in a reliable state after it is installed and commissioned.

6.2 STORAGE CONDITIONS

Until the point of assembly, the device must be stored in a dry location, free from vibrations and with a minimum of dust. The device must be stored in closed rooms.

The air temperature at the storage location must be between -20 °C and 60 °C (-4 °F and 140 °F).

The relative air humidity at the storage location must be between 10 and 95% (without condensation).

6.3 INSTALLATION CONDITIONS

The air temperature at the installation site must be in a range between 0 °C and 40 °C (32 °F and 104 °F).


The relative air humidity at the installation site must be between 10 and 95% (without condensation).

6.4 INSTALLATION AND CONNECTION

The AirCoat manual gun GM 4100AC must be combined with various components to make up a spraying system. The system shown in the figure is only one example of an AirCoat spraying system. Your WAGNER distributor would be happy to assist you in creating a spraying system solution that meets your individual needs.

You must familiarize yourself with the operating manuals and the safety regulations of all additional system components before starting commissioning.

6.4.1 TYPICAL AIRCOAT SPRAYING SYSTEM

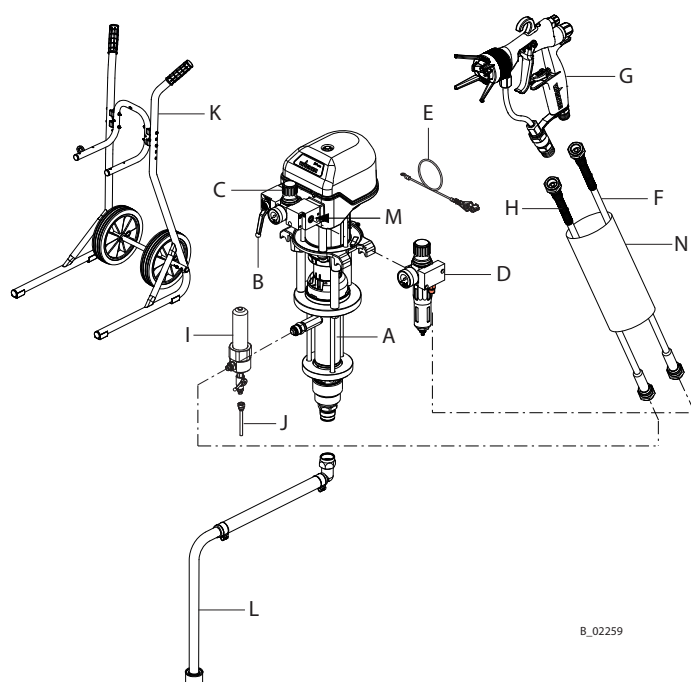

B_02259

Pos	Designation
A	Product pump
B	Compressed air shut-off valve
C	Pressure regulator
D	Air pressure regulator with air filter
E	Grounding cable
F	Air hose, electrically conductive
G	AirCoat spray gun

Pos	Designation
H	High pressure product hose
I	High-pressure filter/product pressure release
J	Return line
K	Pump mounting trolley
L	Suction system
M	Compressed air network
N	Protective hose

6.4.2 VENTILATION OF THE SPRAY BOOTH

- Operate the device in a spray booth approved for the working materials.
- or -
- Operate the device on an appropriate spraying wall with the ventilation (extraction) switched on.
- Observe national and local regulations for the exhaust air speed.

6.4.3 AIR SUPPLY LINES

Ensure that only dry, clean atomizing air is used in the spray gun! Dirt and moisture in the atomizing air worsens the spraying quality and spray pattern.

⚠ WARNING**Hose connections!**

Risk of injury and damage to the device.

→ Do not mix up hose connections of product hose and air hose.

**6.4.4 PRODUCT SUPPLY LINES****ⓘ NOTICE****Impurities in the spraying system!**

Spray gun blockage, products harden in the spraying system.

→ Flush the spray gun and paint supply with a suitable flushing agent.

⚠ DANGER**Bursting hose, bursting threaded joints!**

Danger to life from injection of product.

→ Ensure that the hose material is chemically resistant to the sprayed products.

→ Ensure that the spray gun, fittings and product hose between the device and the spray gun are suitable for the pressure generated in the device.

→ Ensure that the following information can be seen on the high-pressure hose:

- manufacturer,
- permissible operating pressure,
- date of manufacture.

**6.5 GROUNDING****⚠ WARNING****Heavy paint mist if grounding is insufficient!**

Danger of poisoning.

Insufficient paint application quality.

→ Ground all device components.

→ Ground the work pieces to be coated.



A conductive connection (potential equalization cable) must be established between original tank and the equipment.

6.6 SAFETY CHECKS

→ Carry out safety checks in accordance with Chapter [8.2.3](#).

6.7 LACQUER PREPARATIONS

The viscosity of the lacquer is of great importance. The best spraying results are obtained with values between 80 and 260 millipascals (mPas) × sec.

Please also read the technical data sheet of the lacquer for optimal processing, viscosity adjustment and intermixing of the product.

6.8 COMMISSIONING**! NOTICE****Impurities in the spraying system!**

Spray gun blockage.

→ Flush the spray gun and paint supply with a suitable flushing agent before commissioning.


6.8.1 PROCEDURE

1. Secure the spray gun.
2. Connect the product hose to the spray gun and product supply system.
3. Connect air hose to spray gun and to oil-free, dry air supply.
4. For spray guns with filters, insert a suitable filter.
5. Fit nozzle on nozzle seal. Fit air cap over nozzle.
Note the flattened parts (X) on the nozzle and in the air cap.
Fit the union nut with nozzle guard and tighten by hand.
6. Visually check the permissible pressures for all the system components.
7. Make sure that the device and all other conductive parts within the work area are grounded.
8. Set operating pressure at 100 bar; 10 MPa; 1450 psi and use a suitable medium to check that connections do not leak.

Note:

Pull the trigger and check whether the spray gun closes cleanly upon release.

9. Relieve the pressure of the spray gun and device and secure the spray gun.



B_02261

6.8.2 VERIFYING A SAFE OPERATIONAL CONDITION

A skilled person must check to ensure that the device is in a reliable state after it is installed and commissioned.

This includes:

- Carry out safety checks in accordance with Chapter [8.2.3](#).



7 OPERATION

7.1 TRAINING THE OPERATING PERSONNEL

- The operating personnel must be qualified to operate the entire system.
- The operating personnel must be familiar with the potential risks associated with improper behavior as well as the necessary protective devices and measures.
- Before work commences, the operating personnel must receive appropriate system training.

7.2 TASKS

Ensure that:

- the regular safety checks are carried out in accordance with Chapter [8.2.3](#),
- commissioning is carried out in accordance with Chapter [6.8](#).


7.2.1 STARTING TO SPRAY WITH THE AIRCOAT

1. Start up with product supply set to approx. 8 MPa; 80 bar; 1160 psi operating pressure.
2. Spray (release locking device and pull trigger) and at the same time, observe how the product is atomizing.
3. Set the spray pressure on the product pump to a point where good product atomization is achieved.
4. Open the air pressure regulator for the atomizing air and adjust it so that an optimal atomization is achieved. (The interrelation between spray pattern and atomizing air is shown in the figure below).
5. Use the shaping air controller on the spray gun to adjust the shaping air to atomizing air ratio, until the optimal spray pattern is achieved.

Note:

Repeat points 4 and 5 until the optimum spray pattern is reached (iterative process).

Spray pattern shapes

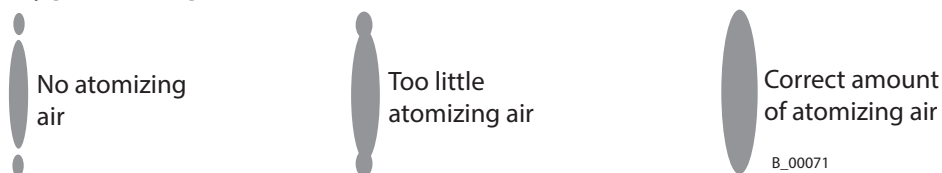

Note:


The flow rate can be changed by:

- changing the product pressure or
- using a different flat jet nozzle (see Chapter [7.4](#) and Chapter [13](#)).

7.2.2 ADJUSTING THE SPRAY PATTERN

The spray pattern can be adjusted to suit the object being sprayed using the shaping air regulator. The illustration shows the influence of the shaping air regulator on the spray pattern.

Other nozzle sizes can be mainly used to obtain larger or smaller spray patterns.

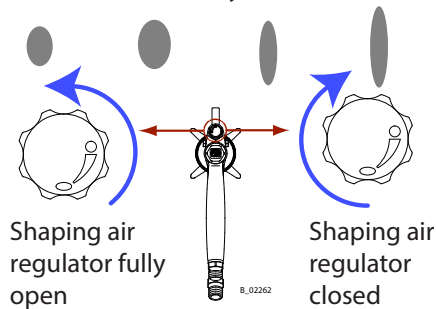

7.3 PRESSURE RELIEF/WORK INTERRUPTION

The pressure must always be relieved:

- after the spraying tasks are finished,
- before servicing or repairing the spraying system,
- before carrying out cleaning tasks on the spraying system,
- Before moving the spraying system to another location.
- before something must be checked on the spraying system,
- before the nozzle or the filter is removed from the spray gun.

The components for pressure relief on a CE-compliant spraying system include:

- Air cock with pressure relief hole mounted between compressed air source and pneumatic pump.
- Outlet equipment (return valve) mounted between pump and spray gun.

Pressure relief procedure

1. Close and secure the spray gun.
2. Relieve the air and product pressure in the product pressure generator in accordance with the respective operating manual.
3. Point the spray gun into the grounded metal tank for return product.
4. Release and open spray gun to relieve the pressure. Avoid splashback.
5. When no further overpressure is detected, close and secure the spray gun.
 - In the case of a clogged nozzle, proceed in accordance with Chapter [7.4.1](#).
 - If the product hose is obstructed: slowly loosen the hose connection to release the remaining pressure.

Note:

Always follow the procedure described above if pressure relief is specified in the operating manual.

If the spraying system has been used with 2K products:

! NOTICE

Hardened product in the spraying system when 2K product is processed!

Destruction of pump and injection system.

- Observe the manufacturer's processing rules, particularly in regards to the pot life.
- Flush thoroughly before the end of the pot life.
- The pot life is decreased by warmth.

7.4 CHANGING AIRCOAT NOZZLE**! NOTICE****Defective AirCoat nozzle!**


Insufficient paint application quality.

→ Do not use sharp-edged objects to treat carbide on the AirCoat nozzle.

1. Relieve the pressure on the spray gun and product pressure generator.
2. Secure the spray gun with the trigger locking device.
3. Unscrew union nut (A).
4. Remove air cap (B).
5. Press AirCoat nozzle (C) out of air cap (B) by hand and treat with cleaning agent until all remaining paint has been dissolved.

Assembly:

6. Fit nozzle (C) in nozzle seal (D).
7. Fit air cap (B) over nozzle (C).
Note the flattened parts (X) on the nozzle and in the air cap.
8. Fit the union nut with nozzle guard (A) and tighten by hand.


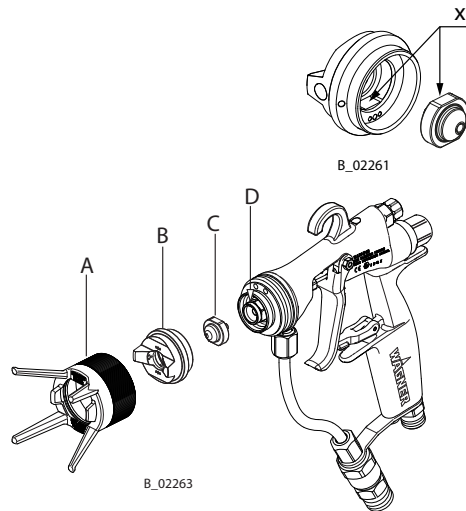
**7.4.1 CLEANING AIRCOAT NOZZLE**

For disassembly and assembly of AirCoat nozzles, see Chapter [7.4](#).

The AirCoat nozzle (C) can be placed into a cleaning solution which has been recommended by the paint manufacturer.

7.4.2 ELIMINATING NOZZLE CLOGGING

1. Relieve the pressure of the spray gun and device.
2. Secure the spray gun with the trigger locking device.
3. Unscrew the union nut with nozzle guard (A).
4. Remove air cap (B).
5. Push AirCoat nozzle (C) manually out of the air cap (B), reverse it and put it onto the nozzle seal (D) with nozzle tip facing towards the rear.
6. Refit air cap (B) on nozzle (C). Note the flattened parts (X) on the nozzle and in the air cap.
7. Screw the union nut with nozzle guard (A) over the air cap (B) onto the spray gun and tighten by hand.
8. Switch the product pressure back on.
9. Turn the locking device to the spraying position and briefly pull trigger.
10. When the blockage has been flushed out, secure the spray gun with the trigger locking device.
11. Relieve the pressure of the spray gun and device.
12. Unscrew the union nut with nozzle guard (A).
13. Remove air cap (B) and push AirCoat nozzle (C) out by hand.
Clean the nozzle and put it back on nozzle seal (D) in the spray position.
14. Refit air cap (B) on nozzle (C). Note the flattened parts (X) on the nozzle and in the air cap.
15. Screw the union nut with nozzle guard (A) over the air cap (B) onto the spray gun and tighten by hand.
16. Switch the product pressure and the air supply pressure back on.

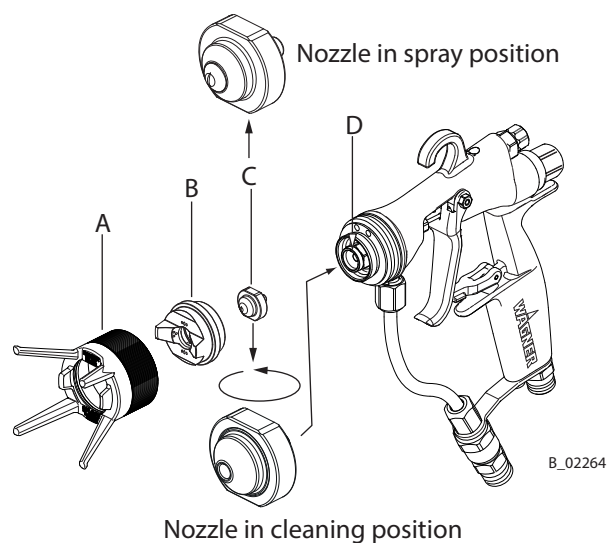

8 CLEANING AND MAINTENANCE

8.1 CLEANING

8.1.1 CLEANING PERSONNEL

Cleaning work should be undertaken regularly and carefully by qualified and trained personnel. They should be informed of specific hazards during their training.

The following hazards may arise during cleaning work:

- Health hazard from inhaling solvent vapors.
- Use of unsuitable cleaning tools and aids.

8.1.2 FLUSHING AND CLEANING THE SPRAY GUN

! NOTICE

Flushing agent in the air duct!

Functional faults caused by swollen seals.


- Always point the spray gun down when cleaning.
- Ensure that neither paint nor flushing agent enters the air duct.
- Never immerse the spray gun in cleaning agent.

The spray gun and the device must be cleaned and flushed daily. The cleaning/flushing agents used for cleaning or flushing must correspond with the working material.

Note:

Methylene chloride is not recommended as an agent for flushing or cleaning the spray gun or other system components.

1. Visual check: personal safety equipment, grounding and all devices ready to use.
2. Relieve the pressure of the product pressure generator and of the spray gun in accordance with Chapter 7.3.
3. Secure the spray gun.
4. Dismount nozzle and clean separately (see Chapter 7.4 and 7.4.1).
5. Supply product pressure generator with flushing agent according to the operating manual of the product pressure generator.
6. Set product pressure generator to a maximum product pressure of 4 MPa; 40 bar; 580 psi.
7. Flush product pressure generator in accordance with the respective operating manual.
8. Point the spray gun without nozzle into the grounded metal tank for return product.
9. Unlock the spray gun and rinse out thoroughly.
10. Cleaning or replacing the product filter in accordance with Chapter 8.2.5.
11. Repeat steps 7–10 if necessary.
12. Relieve the pressure of the product pressure generator and of the spray gun in accordance with Chapter B.1.
13. Secure the spray gun.
14. Clean the gun body with a cleaning agent recommended by the lacquer manufacturer.
Clean the trigger locking device area.
15. Dry with a cloth or a blow gun.
16. Dispose of the contents of the tank for return product according to the local regulations.

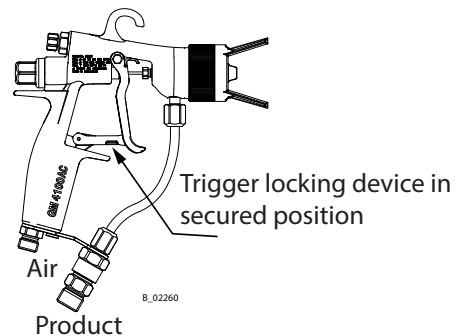

8.2 MAINTENANCE

8.2.1 MAINTENANCE PERSONNEL

Maintenance work should be undertaken regularly and carefully by qualified and trained personnel. They should be informed of specific hazards during their training.

The following hazards may arise during maintenance work:

- risk to health from inhaling solvent vapors,
- use of unsuitable tools and aids.

An authorized person must ensure that the device is checked for being in a reliable state after maintenance work is completed.

8.2.2 SAFETY INSTRUCTIONS

DANGER

Incorrect maintenance/repair!

Danger to life and equipment damage.

- Only a WAGNER service center or a suitably trained person may carry out repairs and replace parts.
- Use only WAGNER original spare parts and accessories.
- Only repair and replace parts that are listed in the "Spare parts" chapter and that are assigned to the unit.
- Before all work on the device and in the event of work interruptions:
 - Relieve the pressure from the spray gun, high-pressure hoses and all devices.
 - Secure the spray gun against actuation.
 - Switch off the energy and compressed air supply.
 - Disconnect the control unit from the mains.
- Observe the operating and service manual for all work.



Prior to Maintenance

- Flush and clean the system. → Chapter [8.1.2](#)
- Interrupt the air supply.

After maintenance

- Carry out safety checks in accordance with Chapter [8.2.3](#).
- Put the system into operation and check for leaks as described in Chapter [6.7](#).
- Have the system checked for safe condition by an authorized person.
- Function test in accordance with Chapter [11](#).

8.2.3 SAFETY CHECKS AND MAINTENANCE INTERVALS**Every day**

- Check grounding: see Chapter [6.5](#).
- Check hoses, tubes and couplings: see Chapter [8.2.4](#).
- Flush and clean the spray gun in accordance with Chapter [8.1.2](#).

Weekly

- Check spray guns for damage.
- Check that the safety fixtures function properly (see Chapter [5.3](#)).

Yearly or as required

- In accordance with DGUV regulation 100-500 Chapter 2.29 and 2.36:
 - The liquid ejection devices should be checked by an expert (e.g., WAGNER service technician) for their safe working conditions as required and at least every 12 months.
 - For shut down devices, the examination can be suspended until the next start-up.

8.2.3.1 PRODUCT HOSES, PIPES AND COUPLINGS

The service life of the complete hoses between product pressure generator and application device is reduced due to environmental influences even when handled correctly.

- Check hoses, pipes, and couplings every day and replace if necessary.
- Before every commissioning, check all connections for leaks.
- Additionally, the operator must regularly check the complete hoses for wear and tear as well as for damage at intervals that he/she has set. Records of these checks must be kept.
- The complete hose is to be replaced as soon as one of the two following intervals has been exceeded:
 - 6 years from the date of the hose crimping (see fitting embossing).
 - 10 years from the date of the hose imprinting.

Fitting embossing	Meaning
xxx bar	Pressure
yymm	Crimping date (year/month)
XX	Internal code

Hose imprinting	Meaning
Wagner	Name / Manufacturer
yymm	Date of manufacture (year/month)
xxx bar (xx MPa) e.g., 270 bar (27 MPa)	Pressure
XX	Internal code
DNxx (e.g., DN10)	Nominal diameter

8.2.4 REPLACING THE PRODUCT HOSE OR AIR HOSE

1. Flush and clean the spray gun in accordance with Chapter [8.1.2](#).
2. Relieve the pressure of the spray gun and device.
3. Secure the spray gun with the trigger locking device.

Product hose



4. Place the size A open-end wrench on the upper part of the product connection and hold it in place.
5. Unscrew the product hose nut using the size B open-end wrench.

Air hose

4. Place the size D open-end wrench on the upper part of the air connection and hold it in place.
5. Loosen the air hose's nut with a size C open-end wrench.

Assembly:

6. Screw on the product hose or air hose by hand and tighten with the two open-end wrenches.

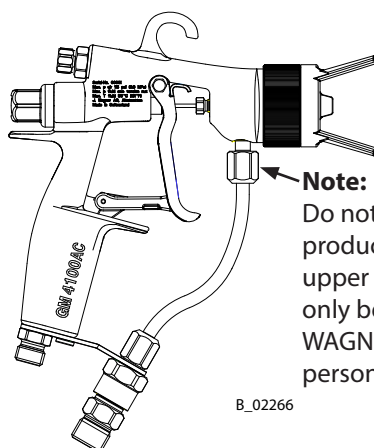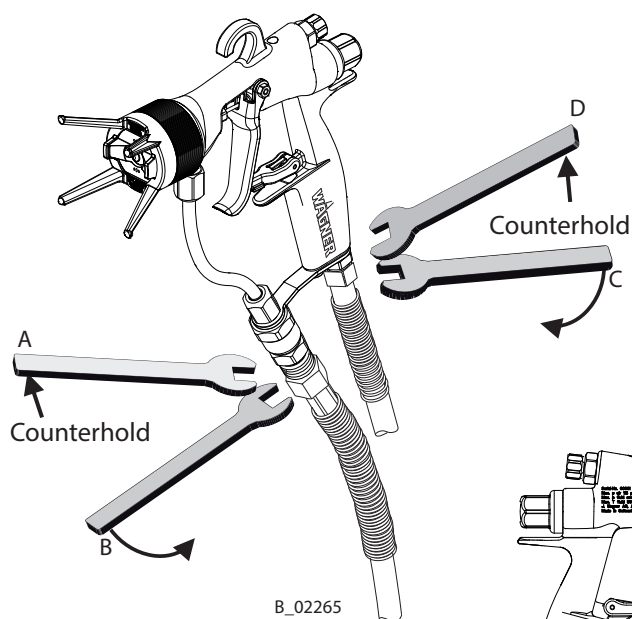


Description	Wrench A	Wrench B	Wrench C	Wrench D
GM 4100AC with NPS1/4" filter	17 mm 0.67 inch	19 mm 0.75 inch	17 mm 0.67 inch	14 mm 0.55 inch

8.2.5 CHANGING OR CLEANING THE EDGE FILTER

1. Flush and clean the spray gun in accordance with Chapter [8.1.2.](#)
2. Relieve the pressure of the spray gun and device.
3. Secure the spray gun with the trigger locking device.
4. Place the size A open-end wrench on the filter socket (32) and hold it in place.
5. Loosen the product hose (33) with a size B open-end wrench.
6. Place the size B open-end wrench on the filter housing (30) and hold it in place.
7. Loosen the filter housing (30) with a size A open-end wrench.
8. Remove the edge filter (31).
9. Clean the filter housing (30), filter socket (32) and edge filter with flushing agent.

Assembly:

10. Fit the cleaned or new edge filter (31) into the filter socket (32).
11. Screw on filter socket (32) by hand and tighten with two open-ended wrenches.
12. Place the product hose (33) on the filter socket (32) and tighten with two open-ended wrenches.

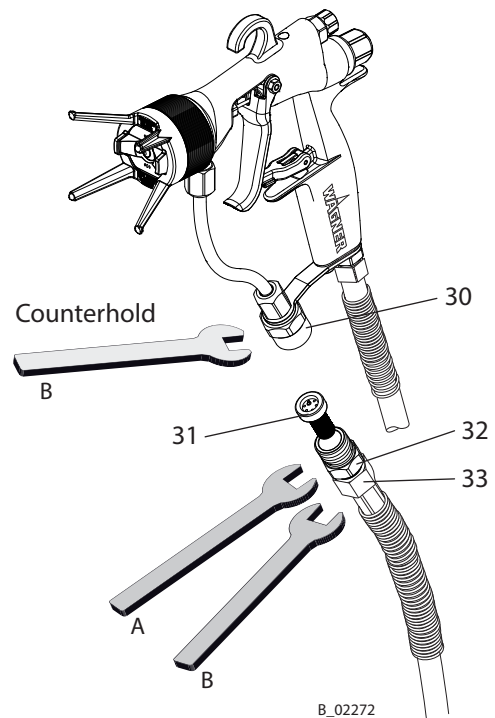

9 TROUBLESHOOTING AND RECTIFICATION

Functional fault	Cause	Remedy	See Chapter
Insufficient product output	Nozzle too small	Select larger nozzle.	13
	Product pressure too low.	Increase product pressure.	
	Spray gun filter or high-pressure filter clogged at pump.	Clean or replace filter.	8.2.5
	Nozzle clogged.	Nozzle cleaning	7.4.2
	Filter/nozzle pairing unfitting.	Change filter and/or nozzle.	7.4 and 8.2.5
	The valve rod path is too short.	Replace the valve rod and valve seat.	8.2.5
Poor spray pattern	Atomizing air incorrectly adjusted.	Readjust the atomizing air.	7.2.1
	Nozzle worn.	Replace the nozzle.	7.4
	Product pressure too low.	Increase the product pressure at pump.	
	The spray product viscosity is too high.	Dilute the spray product in accordance with the manufacturer's instructions.	
		The product temperature is too low.	
	Nozzle partially clogged.	Nozzle cleaning	7.4 and 7.4.2
	The drilled holes in the air cap are damaged or clogged.	Clean or replace the air cap.	7.4.2
	Incorrectly selected air cap.	Insert the correct air cap (solvent/water based lacquer).	7.4.2 and 13.2
Valve rod leaks (paint path or air path)	The seals on the valve rod are damaged or the valve rod itself is damaged.	Replace the entire valve rod or the individual seals.	10.4
	Air valve seals are leaky.	Replace the air valve seal.	10.6
	Pretension is too low.	Tighten the sealing screw.	
Spray gun will not shut off correctly	The valve seat or the valve ball is damaged.	Replace the parts.	10.4
	Pretension of the seals is too strong.	Replace the seals.	10.4 and 10.7

10 REPAIR WORK

10.1 REPAIR PERSONNEL

Repair work should be undertaken carefully by qualified and trained personnel. They should be informed of specific hazards during their training.

The following hazards may arise during repair work:

- risk to health from inhaling solvent vapors,
- use of unsuitable tools and aids.

A skilled person must check to ensure that the device is in a reliable state after it is repaired. Carry out function test in accordance with Chapter [11](#).

10.2 REPAIR NOTES

DANGER

Incorrect maintenance/repair!

Danger to life and equipment damage.

- Only a WAGNER service center or a suitably trained person may carry out repairs and replace parts.
- Use only WAGNER original spare parts and accessories.
- Only repair and replace parts that are listed in the "Spare parts" chapter and that are assigned to the unit.
- Before all work on the device and in the event of work interruptions:
 - Relieve the pressure from the spray gun, high-pressure hoses and all devices.
 - Secure the spray gun against actuation.
 - Switch off the energy and compressed air supply.
 - Disconnect the control unit from the mains.
- Observe the operating and service manual for all work.



Before Repair Work

- Flush and clean the system in accordance with Chapter [8.1.2](#).
- Interrupt the air supply.

After Repair Work

- Carry out safety checks in accordance with Chapter [8.2.3](#).
- Put the system into operation and check for leaks as described in Chapter [6.8](#).
- Have the system checked for safe condition by an authorized person.
- Function test in accordance with Chapter [11](#).

10.3 TOOLS

The following tools are required for carrying out the repair work on the gun described below:

- Open-end wrench size 5; size 6; size 7; size 13; size 15.
- Socket wrench size 13; size 15
- Mounting key, Order no. 179989
- Nozzle wrench, complete, Order no. 128901
- Torque wrench 12±1 Nm; 8.85 lbft
- Pipe wrench
- Pin ø 1.5 mm

Assembly aids:

Order no.	Quantity	Designation	Smaller tanks
9992831	1 pc $\triangle$ 50 ml	Loctite $^{\circ}$ 542	
9992833	1 pc $\triangle$ 250 ml	Loctite $^{\circ}$ 638 green	
9992590	1 pc $\triangle$ 50 ml	Loctite $^{\circ}$ 222	
9992698	1 pc $\triangle$ 200 g	Vaseline white, PHHV II	
394342	1 pc $\triangle$ 1 kg can	Tool valve rod seal	
9992616	1 pc $\triangle$ 1 kg can	Molykote $^{\circ}$ DX grease	50 g tube $\triangle$ Order No. 2355419

Brand notice:

The brands specified in this document are property of the respective owners. Loctite[®], for example, is a registered brand of Henkel.

10.4 REPLACING PARTS ON THE VALVE ROD

1. Relieve the pressure of the spray gun and device.
2. Decommission and clean in accordance with Chapter [8.1.2](#).
3. Secure the spray gun with the trigger locking device.
4. Unscrew spring cap (5) and remove pressure springs (2) and (3).
5. Loosen the screw (22) and remove together with the nut (20).
6. Remove the trigger (21).
7. Loosen the sealing screw (10) using a size 7 mm; 0.28 inch single open-end wrench (100).


NOTICE

Unsuitable tool!

Damage to seals and sealing surfaces.

→ Do not hold the valve rod with pliers or a similar tool.


8. Carefully pull the valve rod (B), together with sealing screw, backwards out of the gun housing (A).
9. Hold the clamping sleeve (4) with a size 6 mm; 0.24 inch open-end wrench (101) and loosen collet chuck (18) with a size 5 mm; 0.20 inch open-end wrench (102).
10. Carefully pull valve rod (34) out forwards. Replace relevant parts. When changing the valve rod, the valve seat (Order no. 394922) must also always be replaced.

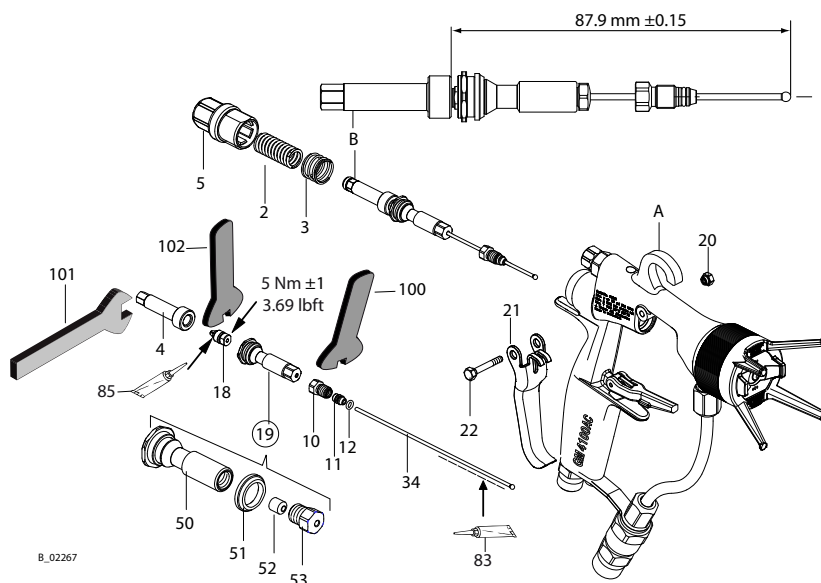

10.4.1 REPLACING VALVE TAPPET SEALS

1. Using a size 13 mm; 0.51 inch open-end wrench, counterhold valve tappet (50) and, using a size 7 mm; 0.28 inch open-end wrench, unscrew cap (53).
2. Remove the air valve seal (51) and seal (52) and replace with new seals.
3. Screw the valve tappet (50) and cover (53) together by hand.

Carefully tighten in small increments with a 7 mm; 0.28 inch and 13 mm; 0.51 inch open-end wrench until a slight resistance is perceptible when moving the valve rod (34) in the valve tappet.

**Note:**



The seal (52) can be pulled out of the cover (53) with the help of an eye bolt.

10.4.2 REPLACING THE ROD SEAL (35)

1. Carefully pull the rod seal (35) out of the gun housing.
2. Clean sealing surfaces in the gun housing.
3. Fit the new rod seal (35) to the rod seal tool (84).

Note:

Note the installation position of the rod seal (35).

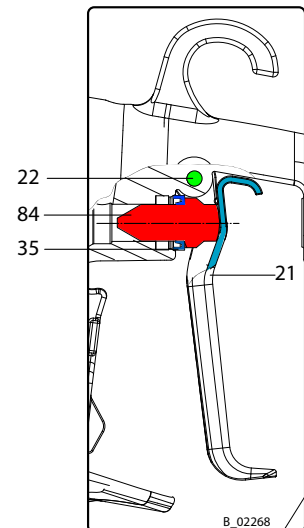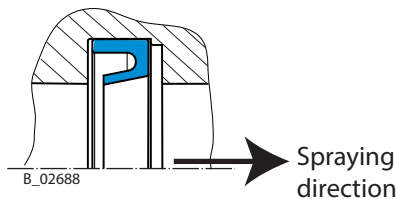

4. Insert the rod seal tool (84) together with the rod seal (35) into the drilled hole.
5. Fit the trigger (21) with screw (22) to the gun body.
6. Carefully push the tool with the rod seal (35) over the trigger (21) into the recess in the housing.
7. Remove the trigger (21), screw (22) and rod seal tool (84).

10.4.3 ASSEMBLY

1. Attach the sealing collar (11) to the valve rod (34) together with the inserted O-ring (12) and sealing screw (10).
2. Push the completely assembled valve tappet (19) onto the valve rod (34).
3. Insert the preassembled valve rod into the collet chuck (18) up to the stop.
4. Hold the clamping sleeve (4) with size 6 mm; 0.24 inch wrench in position, screw the preassembled valve rod to the clamping sleeve and tighten with a size 5 mm; 0.20 inch open-end wrench.
5. Carefully insert the complete valve rod (B) into the gun housing.
6. Screw in the sealing screw (10) but do not tighten yet.
7. Position the trigger (21) and fasten with screw (22) and nut (20).
8. Insert the pressure springs (3) and (2) and screw on the spring cap (5), tightening torque 12 Nm; 8.85 lb ft.
9. Carefully tighten the sealing collar (11, 12) over the sealing screw (10). Ensure that the trigger moves smoothly.
10. Commissioning in accordance with Chapter 6.8.


Note: Only use silicone and resin-free grease.

10.5 REPLACING THE NOZZLE SEAL**! NOTICE****Defective nozzle seal!**

Product sprays into the air cap next to the nozzle.

- Do not clean the nozzle seal with sharp-edged objects.
- Replace the nozzle seal if the sealing surface is damaged.

1. Relieve the pressure of the spray gun and device in accordance with Chapter 7.3.
2. Decommission and clean in accordance with Chapter 8.2.1.
3. Secure the spray gun with the trigger locking device.
4. Unscrew the union nut with nozzle guard (33).
5. Remove the air cap (36) together with the nozzle (13).
6. Carefully release the nozzle seal (17) using a screwdriver.
7. Attach the new nozzle seal to the valve housing (16).
8. Continue assembly in the reverse order.

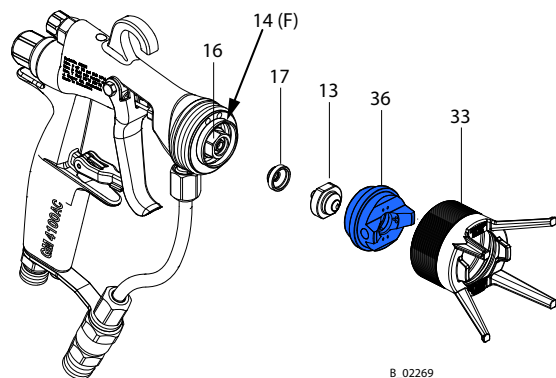

B_02269

10.6 REPLACING THE "AIR" SEALING RING**! NOTICE****Shaping air and atomizer air not separate!**

Poor spray pattern.



Spray jet cannot be adjusted.

→ Handle the sealing ring (14) with care.

1. Relieve the pressure of the spray gun and device in accordance with Chapter [7.3](#).
2. Decommission and clean in accordance with Chapter [8.1.2](#).
3. Secure the spray gun with the trigger locking device.
4. Unscrew the union nut with nozzle guard (33).
5. Remove the air cap (36) together with the nozzle (13).
6. Remove the defective sealing ring (14) with the help of pipe tongs or with a large screwdriver.

Assembly:

7. Plug the new sealing ring (14) onto the air cap (36).
8. Place air cap in body of gun together with sealing ring (14).
9. Attach the union nut (33) and screw it in until the sealing ring snaps into place in the mounting groove (audible snap).
10. Demount the union nut (33) and air cap (36) and complete the spray gun in accordance with Chapter [7.4](#).

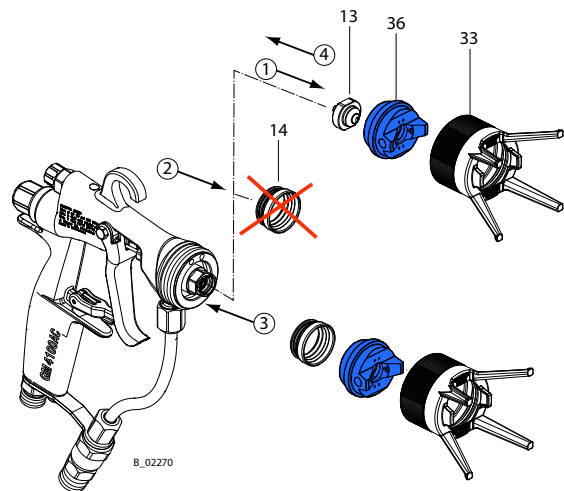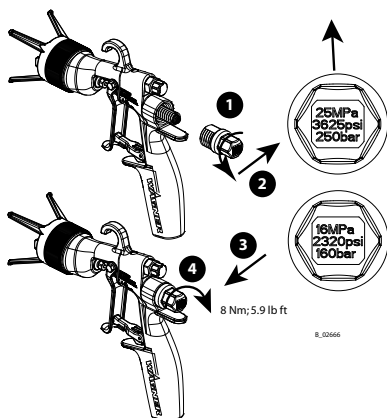**10.7 REPLACING THE SPRING CAP**

11 FUNCTION TEST AFTER REPAIR WORK

After all repair work, the spray gun must be checked for safe condition before recommissioning. The necessary scope of inspection and testing depends on the repair carried out and must be documented by the repair personnel.

Assembly inspection	
Activity	Means
1. Leak test – Connect 1 bar; 0.1 MPa; 14.50 psi and 8 bar; 0.8 MPa; 116 psi air pressure to the air connection and product connection. Place the spray gun completely into the water bath and check all sealing points with 1 bar; 0.1 MPa; 14.50 psi and 8 bar; 0.8 MPa; 116 psi for leaks. At 8 bar; 0.8 MPa; 116 psi bar, the gun must be completely sealed. At 1 bar; 0.1 MPa; 14.50 psi, a slight leak can be tolerated: 5 air bubbles per minute.	Air connection 1 bar / 8 bar Water bath
Injection and Final Inspection	
Activity	Means
2. Trigger lever function test – The trigger lever must be pulled as far as it will go. Make sure that the trigger lever can move slightly in its rest position. – Put the trigger lever locking device into the locking position, configure the air product pressure, and pull the trigger lever. Neither air nor product may leak or escape. – Check that the trigger lever locking device is not reset by the trigger lever when pulling in the locking position.	Manual inspection
3. Leak test – Connect the gun, slowly increase the product pressure in increments using a suitable medium until the maximum pressure (250 bar, 25 MPa; 3625 psi or 160 bar, 16 MPa; 2320 psi) specified on the spring cap is reached. – Trigger and flush the spray gun multiple times. – Check the following: - Is the product connection sealed when the gun is closed? - Is the product valve sealed? - Is there no product discharge at the valve rod seal? If product leaks, tighten the sealing screw: The sealing screw on the valve rod must be tightened. Tighten the sealing screw with the open-end wrench if necessary. (In doing so, it is important to make sure that the valve rod still runs smoothly and the gun closes reliably).	Visual inspection The 160 bar variant is inspected at 160 bar. 250 bar or 160 bar product connection Atomizing air 3 bar Size 7 open-end wrench for the sealing screw

Activity	Means
4. Checking the switching sequence – Attach the AC nozzle and air cap. – Set the injection pressure to 100 bar; 10 MPa; 1450.40 psi, pull the trigger slowly, note the switching sequence "switch on" and "switch off". Switch on: atomizing air / shaping air on, product on Switch off: product off, atomizing air / shaping air off	Visual inspection
5. Flush the spray gun – Switch off the air and product supply, open flushing valve, pull trigger lever and flush gun or blow out with air. Flush the gun without the valve and air cap. In doing so, you can remove the air connection hose. – Close the flushing valve. When almost no more product comes out, remove the product connection hose and blow the rest of the test medium out of the spray gun using an air gun.	

12 DISPOSAL

When the equipment must be scrapped, please differentiate the disposal of the waste materials.

The following materials have been used:


- Stainless steel
- Aluminum
- Elastomers
- Plastic
- Carbide

The consumable products (lacquers, adhesives, solvents) must be disposed of in accordance with the applicable specific standards.

13 ACCESSORIES


13.1 ROUND JET NOZZLE ATTACHMENT

Order no.	Designation
394180	Round jet nozzle attachment (without nozzle insert)

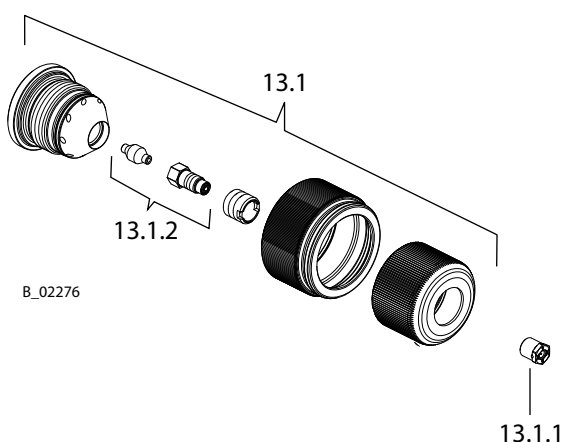

13.1.1 NOZZLE INSERTS RXX

Order no.	Designation	Marking	Volumetric flow rate*	Jet Ø**
132720	Nozzle insert R11	11	0.16; 160	approx. 250; 9.84
132721	Nozzle insert R12	12	0.22; 220	approx. 250; 9.84
132722	Nozzle insert R13	13	0.27; 270	approx. 250; 9.84
132723	Nozzle insert R14	14	0.34; 340	approx. 250; 9.84
132724	Nozzle insert R15	15	0.38; 380	approx. 250; 9.84
132725	Nozzle insert R16	16	0.43; 430	approx. 250; 9.84
132726	Nozzle insert R17	17	0.48; 480	approx. 250; 9.84
132727	Nozzle insert R18	18	0.53; 530	approx. 250; 9.84
132728	Nozzle insert R19	19	0.59; 590	approx. 250; 9.84
132729	Nozzle insert R20	20	0.65; 650	approx. 250; 9.84
132730	Nozzle insert R21	21	0.71; 710	approx. 250; 9.84
132731	Nozzle insert R22	22	0.77; 770	approx. 250; 9.84




* Volumetric flow in l/min; cc/min water at 10 MPa; 100 bar; 1450 psi

** Jet ø in mm; inches at a distance of 30 cm; 11.8 inches from the object and at a pressure of 10 MPa; 100 bar; 1,450 psi, synthetic resin lacquer, 20 DIN 4 seconds.


13.1.2 NOZZLE SCREW JOINT, COMPLETE

Order no.	Designation
132922	Nozzle screw joint, complete




13.2 AIRCOAT NOZZLES ACF3000

Order no.	Marking	Drilled hole Ø inch; mm	Spray angle	Recommended edge filter Application		
379207	07/20	0.007-0.18	20°			
379209	09/20	0.009-0.23	20°			Clear lacquer
379309	09/30	0.009-0.23	30°			Oils
379409	09/40	0.009-0.23	40°			
379509	09/50	0.009-0.23	50°			
379609	09/60	0.009-0.23	60°			
379111	11/10	0.011-0.28	10°	200 mesh		Synthetic resin lacquer
379211	11/20	0.011-0.28	20°			PVC lacquer
379311	11/30	0.011-0.28	30°			
379411	11/40	0.011-0.28	40°			
379511	11/50	0.011-0.28	50°			
379611	11/60	0.011-0.28	60°			
379113	13/10	0.013-0.33	10°	100 mesh		Lacquers
379213	13/20	0.013-0.33	20°			Base coat
379313	13/30	0.013-0.33	30°			Primer
379413	13/40	0.013-0.33	40°			Filler
379513	13/50	0.013-0.33	50°			
379613	13/60	0.013-0.33	60°			
379813	13/80	0.013-0.33	80°			
379115	15/10	0.015-0.38	10°			Filler
379215	15/20	0.015-0.38	20°			Rust proofing paints
379315	15/30	0.015-0.38	30°			
379415	15/40	0.015-0.38	40°	60 mesh		
379515	15/50	0.015-0.38	50°			
379615	15/60	0.015-0.38	60°			
379815	15/80	0.015-0.38	80°			
379217	17/20	0.017-0.43	20°			Rust proofing paints
379317	17/30	0.017-0.43	30°			Latex paints
379417	17/40	0.017-0.43	40°			
379517	17/50	0.017-0.43	50°			
379617	17/60	0.017-0.43	60°			
379817	17/80	0.017-0.43	80°			



B_02280


Order no.	Marking	Drilled hole Ø inch; mm	Spray angle	Recommended edge filter Application		
379219	19/20	0.019-0.48	20°	60 mesh		Rust proofing paints
379319	19/30	0.019-0.48	30°			Latex paints
379419	19/40	0.019-0.48	40°			
379519	19/50	0.019-0.48	50°			
379619	19/60	0.019-0.48	60°			
379819	19/80	0.019-0.48	80°			
379221	21/20	0.021-0.53	20°			Mica paints
379421	21/40	0.021-0.53	40°			Zinc rich paints
379521	21/50	0.021-0.53	50°			Rust proofing paints
379621	21/60	0.021-0.53	60°			Glue paints
379821	21/80	0.021-0.53	80°			
379423	23/40	0.023-0.58	40°			
379623	23/60	0.023-0.58	60°			
379823	23/80	0.023-0.58	80°			
379425	25/40	0.025-0.64	40°			
379625	25/60	0.025-0.64	60°			
379825	25/80	0.025-0.64	80°			
379427	27/40	0.027-0.69	40°			
379627	27/60	0.027-0.69	60°			
379827	27/80	0.027-0.69	80°			
379429	29/40	0.029-0.75	40°			
379629	29/60	0.029-0.75	60°			
379829	29/80	0.029-0.75	80°			
379431	31/40	0.031-0.79	40°			
379531	31/60	0.031-0.79	60°			
379631	31/80	0.031-0.79	80°			
379435	35/40	0.035-0.90	40°			
379635	35/60	0.035-0.90	60°			
379835	35/80	0.035-0.90	80°			




13.3 AIR CAPS

Order no.	Designation	
2313494	Air cap LV plus (red) for low viscosity products	 B_02257
2313497	Air cap HV plus (blue) for high viscosity products	 B_02258
2313498	Air cap LA plus (bronze) low air	 B_02396

13.4 ANODIZED UNION NUT

Order no.	Designation	
2330340	Completely anodized union nut (without air cap) suitable for the processing of water-based coatings	

13.5 SWIVEL JOINTS AND FILTER



Order no.	Designation	
394931	Swivel joint set for product connection (NPSM 1/4") and for air connection (G1/4")	
394926	Swivel joint for product connection (NPSM 1/4") with filter, 100 mesh	
364938	Swivel joint for air connection G1/4"	
3204605	Filter 100 mesh	
3204604	Filter 60 mesh	
9999002	Filter 200 mesh	

13.6 HOSES

Order no.	Designation
2309705	AC hose set DN3 PN270 1/4"NPS 7.5 m PA T
	Product: 1/4"NPS, 7.5 m; 24.6 ft, DN 3; ID 0.12 inch, 27 MPa; 270 bar; 3916 psi
	Air: G1/4", 7.5 m; 24.6 ft, DN 6 mm; ID 0.24 inch, 1 MPa, 10 bar; 145 psi
2309706	AC hose set DN4 PN270 1/4"NPS 7.5 m PA T
	Product: 1/4"NPS, 7.5 m; 24.6 ft, DN 4; ID 0.16 inch, 27 MPa; 270 bar; 3916 psi
	Air: G1/4", 7.5 m; 24.6 ft, DN 6 mm; ID 0.24 inch, 1 MPa, 10 bar; 145 psi
2312801	AC hose set DN4 PN270 1/4"NPS 10.0 m PA T
	Product: 1/4"NPS, 10 m; 32.8 ft, DN 4; ID 0.16 inch, 27 MPa; 270 bar; 3916 psi
	Air: G1/4", 10 m; 32.8 ft, DN 6 mm; ID 0.24 inch, 1 MPa, 10 bar; 145 psi
2309634	AC hose set DN4 PN270 1/4"NPS 15.0 m PA T
	Product: 1/4"NPS, 15 m; 49.2 ft, DN 4; ID 0.16 inch, 27 MPa; 270 bar; 3916 psi
	Air: G1/4", 15 m; 49.2 ft, DN 6 mm; ID 0.24 inch, 1 MPa, 10 bar; 145 psi
2309635	AC hose set DN4 PN270 1/4"NPS 20.0 m PA T
	Product: 1/4"NPS, 20 m; 65.6 ft, DN 4; ID 0.16 inch, 27 MPa; 270 bar; 3916 psi
	Air: G1/4", 20 m; 65.6 ft, DN 6 mm; ID 0.24 inch, 1 MPa, 10 bar; 145 psi
2322656	AC hose set DN3 PN270 1/4"NPS 3.0 m PA T
	Product: 1/4"NPS, 3 m; 9.84 ft, DN 3; ID 0.12 inch, 27 MPa; 270 bar; 3916 psi
	Air: G1/4", 3 m; 9.84 ft, DN 6 mm; ID 0.24 inch, 1 MPa, 10 bar; 145 psi
9987136	Protective hose, per meter

All AC hose sets consist of a section each of product, air and protective hose.

13.7 MISCELLANEOUS

Order no.	Designation	
9997001	Nozzle cleaning brush	
394940	Service set GM 4100AC	
394904	Conversion set 16 MPa; 160 bar; 2320 psi	
394905	Conversion set 25 MPa; 250 bar; 3625 psi	
2353764	Conversion set 35 MPa; 350 bar; 5076 psi	
367560	Double connector NPSM1/4" (external thread), for product hose extension	 B_02685
9985720	Double nipple G1/4" (external thread), for air hose extension	 B_02686
2324747	Sealing collar UHMW-PE, complete, suitable for 2K-PU lacquers	 B_04187

14 SPARE PARTS

14.1 HOW CAN SPARE PARTS BE ORDERED?

Always supply the following information to ensure delivery of the right spare part:

Order number, designation and quantity

The quantity need not be the same as the number given in the quantity column "**Stk**" on the list. This number merely indicates how many of the respective parts are used in each component.

The following information is also required to ensure smooth processing of your order:

- address for the invoice,
- address for delivery,
- name of the person to be contacted in the event of any queries,
- type of delivery (normal mail, express delivery, air freight, courier, etc.).

Identification in spare parts lists

Explanation of column "**K**" (labeling) in the following spare parts lists:

- ◆ Wearing parts/ Wearing parts are not included in the warranty terms.
- ★ Included in service set

Notice

These parts are not covered by warranty terms.

- Not part of standard equipment, available, however, as additional extra.

Explanation of order no. column

- Item not available as spare part.
- / Position does not exist.


DANGER

Incorrect maintenance/repair!

Danger to life and equipment damage.

- Only a WAGNER service center or a suitably trained person may carry out repairs and replace parts.
- Use only WAGNER original spare parts and accessories.
- Only repair and replace parts that are listed in the "Spare parts" chapter and that are assigned to the unit.
- Before all work on the device and in the event of work interruptions:
 - Relieve the pressure from the spray gun, high-pressure hoses and all devices.
 - Secure the spray gun against actuation.
 - Switch off the energy and compressed air supply.
 - Disconnect the control unit from the mains.
- Observe the operating and service manual for all work.

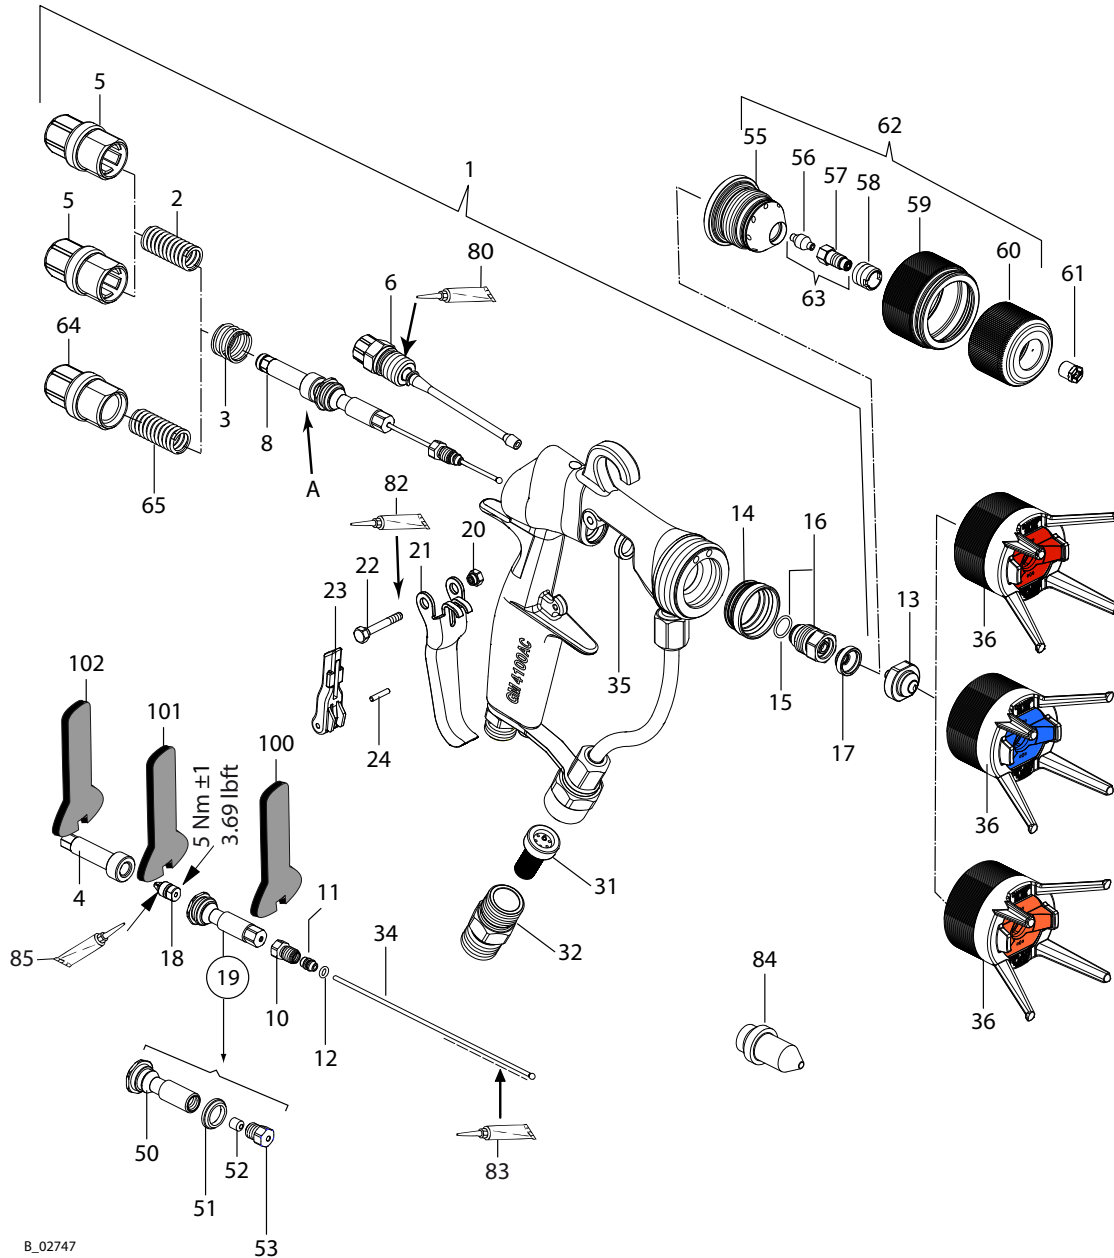

14.2 SPARE PARTS LIST GM 4700AC

B_02747

Pos	K	Stk	Order no.	Designation
1		1	394012	GM 4100AC; XX MPa; NPSM1/4"
2		1	9999501	Helical spring, material
3		1	9999500	Helical spring, air
4		1	2312140	Clamping sleeve
5		1	394335	Spring cap 16 MPa; 160 bar; 2320 psi
5		1	394333	Spring cap 25 MPa; 250 bar; 3625 psi
6	◆	1	394924	Air tappet, complete
8	◆	1	2311320	Valve rod unit, complete
10		1	394327	Sealing screw

Pos	K	Stk	Order no.	Designation
11	★ ◆	1	394328	Sealing collar
11	◆ ●	1	2324747	Sealing collar UHMW-PE, complete (including pos. 12)
12	★ ◆	1	9971445	O-ring
13	◆ ●	1	379xxx	AC nozzle (see Chapter 13.2)
14	★ ◆	1	394339	Sealing ring
15	★ ◆	1	9974245	O-ring
16	★ ◆	1	394922	Valve housing, complete
17	★ ◆	1	394338	Nozzle seal
18		1	2312149	Collet chuck
19		1	394257	Valve tappet, complete
20		1	394318	Nut
21		1	394310	Trigger
22		1	394319	Screw
23		1	394334	Safety clip
24		1	9935088	Parallel pin
31	◆	1	3204605	Edge filter, 100 mesh (for other sizes see Chapter 13.5)
32		1	394340	Filter socket NPSM 1/4"
34	★ ◆	1	394920	Valve rod, complete
35	★ ◆	1	394323	Rod seal
36	◆ ●	1	2313494	Air cap LV plus (red)
36	◆ ●	1	2313497	Air cap HV plus (blue)
36	◆ ●	1	2313498	Air cap LA plus (bronze)
50		1	394309	Valve tappet
51	★ ◆	1	179338	Air valve seal
52	★ ◆	1	179395	Seal
53	★ ◆	1	394322	Cap
55	●	1	394336	Nozzle body
56	◆ ●	1	128327	Sealing fitting
57	◆ ●	1	132516	Nozzle screw joint, complete
58	●	1	132351	Nozzle screwed connection holder
59	●	1	394308	Union nut
60	●	1	394337	Nozzle nut
61	◆ ●	1	132...	Nozzle insert R (various dimensions see Chapter 13.1.1)
62	●	1	394180	Round jet nozzle attachment (see Chapter 13.1)
63	◆ ●	1	132922	Nozzle screw joint, complete
64	●	1	2352651	Spring cap 35 MPa; 350 bar; 5076 psi
65	●	1	2353758	Pressure spring for spring cap 35 MPa; 350 bar; 5076 psi
		1	394940	Service set GM 4100AC

◆ = Wearing part

★ = Included in service set

● = Not part of the standard equipment but available as a special accessory

Assembly Aids

Pos	K	Bestellnr.	Designation
80	●	9992831	Loctite ® 542
81	●	9992833	Loctite ® 638 green
82	●	9992590	Loctite ® 222
83	●	9992698	Vaseline white, PHHV II
84	★ ●	394342	Tool valve rod seal
85	●	-	Molykote ®

★ = Included in service set

● = Not part of the standard equipment but available as a special accessory

15 EU DECLARATION OF CONFORMITY

Herewith we declare that the supplied version of:

GM 4100AC 25 MPa

complies with the following guidelines:

2006/42/EC
2014/34/EU

Applied standards, in particular:

EN ISO 12100:2010	EN 1127-1:2011
EN 1953:2013	EN ISO 80079-36:2016
EN ISO 13732-1:2008	EN ISO/IEC 80079-34:2011
EN 14462:2015	--

Applied national technical standards and specifications, in particular:


DGUV regulation 100-500 Chapter 2.29
DGUV regulation 100-500 Chapter 2.36
TRGS 727

Identification:   II 2G X


EU Declaration of Conformity

The EU Declaration of Conformity is enclosed with this product. If needed, further copies can be ordered through your WAGNER dealer by specifying the product name and serial number.

Order number: 394891



A series of horizontal lines for writing, starting from the top right of the notepad icon and extending across the page.



A series of horizontal lines for writing, starting from the top right of the notepad icon and extending across the page.



Order no. 394821
Edition 01/2018

Germany

J. Wagner GmbH
Otto-Lilienthal-Str. 18
Postfach 1120

88677

Markdorf

Phone +49/ (0)7544 / 5050
Telefax +49/ (0)7544 / 505200
E-Mail ts-liquid@wagner-group.com

Switzerland

Wagner International AG
Industriestrasse 22

9450

Altstätten

Phone +41/ (0)71 / 757 2211
Telefax +41/ (0)71 / 757 2222

More contact addresses:
www.wagner-group.com

Subject to changes without notice